

## ASSEMBLY INSTRUCTIONS FOR UUALK SUN

1. You will receive a parcel like the one in the pictures with the following dimensions: 150cm large, 80cm high and 27cm wide.  
The parcel is easily transportable in a middle size car with backdoor.



2. To assembly Uualk-Sun you will require the following tools:



- a. A cutting tool (scissors or cutter)
- b. An allen key wrench number 5, 6 and 8.
- c. An adjustable wrench or wrench number 10 and 15.
- d. A flathead screwdriver.

3. Open the parcel. Inside you will find the following elements:
  - a. An e-bike with a battery (with 2 keys), the rear wheel already mounted.
  - b. Two pedals.
  - c. Front mudguard.
  - d. Battery charger.
  - e. Front rear.
  - f. Handlebar.
  - g. Battery instructions.



4. Take off the plastic and the paper that protects the Uualk Sun..



5. Disassemble the battery using one of the keys and charge it. **VERY IMPORTANT: connect the charger cable to the battery and then connect the charger to the power. We recommend doing a first charge of 12 hours.** Subsequent re-charges takes from 4h to 6h to fully charge, it will be indicated with a green light. To disconnect from the power, first unplug the charger from the power, then unplug the charger from the battery.



6. Take off the plastic protector from the handlebar. Switch the handlebar to the front and screw using allen wrench number 5 and 6 accordingly.

7. Unscrew the fork using wrench number 10 and allen key number 6. Place the front mudguard. Place the front light on the fork front side. Place the mudguard support on the fork back side. Screw all this elements.



8. Place the front wheel. There is no right or left side position. Screw the wheel using wrench number 15.



9. Place the brake cable as follow: Move the black rubber to the left until suits with the thin support. You may need to do some pressure. To facilitate this step, you can unscrew the cable using allen key wrench number 6 and screw it again. Ensure that wheels are riding without touching the brakes and that there is a correct travel of brake lever.




10. Fix the spokes into the front mudguard suport using allen key wrench 6.

11. Fix the front light using the flathead screwdriver.



12. Place the pedals according to the sides. Screw the pedals using wrench number 15. Remember that pedals must be threaded clockwise to avoid that unscrews during your ride.

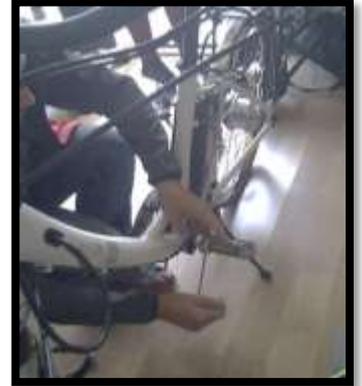

13. Once the battery is fully charge you must place it and lock it using the key. **VERY IMPORTANT: Please, keep the spare key in a save place or make a copy of key. We do not have replacement key in case of lost.**

14. Place the saddle and adjust the correct saddle height. Clamp the saddle post.



Enjoy your bike.

**VERY IMPORTANT: Take in mind that battery should be always charged.** Do not wait to empty the battery to re-charge it.

UUALK TEAM